
EG4 ELECTRONICS

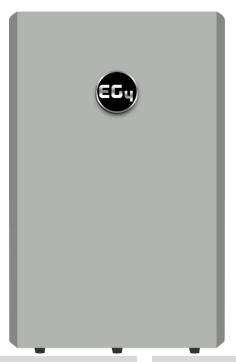

POWERPRO WALLMOUNT ALL WEATHER LITHIUM BATTERY

The PowerPro WallMount All Weather 280Ah batteries are ideal for low-voltage residential outdoor energy storage system (ESS) applications. The batteries use lithium iron phosphate cells with the highest safety performance and an intelligent Battery Management System (BMS) that can monitor and record the voltage of each cell along with the current, voltage, and temperature of the module in real-time. The BMS also contains a passive balance function and an advanced battery control method, both of which improve the performance of the battery pack.

BUILT-IN 200A BMS INTEGRATED 600A BUSBARS 82.6MWh LIFETIME PRODUCTION* 10 YEAR
WARRANTY
>8000 CYCLES @
80% DOD

ON-BOARD LCD TOUCH SCREEN

Easy to see BMS monitoring, and selectable closed-loop communications with EG4, Schneider, Sol-Ark, Victron, Growatt, Megarevo, Luxpower, and Deve inverters.

DUAL ON-BOARD FIRE ARRESTORS

Offer fail-safe protection against thermal runaway.

WEATHER-TIGHT OUICK CONNECTS

Included battery cables with outdoor rated connectors allowing for fast, safe, and reliable battery connections.

INTEGRATED SELF-HEATING FEATURE

Heats the battery when the ambient temperature is low. A key feature for outdoor Lithium battery cell operations.

INTEGRATED BUSBARS

The battery design comes manufactured with 600A internal busbars with multiple terminals (4 positive & 4 negative) eliminating the need for external busbars when paralleling batteries and/or multiple inverters.

INNOVATIVE EMERGENCY STOP FUNCTION

The optional ESS disconnect can shut down all batteries and inverters (if equipped with rapid shut down capability) with the press of a button.

THE PERFECT PARTNER TO THE EG4 18kPV

The optional conduit box mates up directly to the connection ports of the inverter allowing a sleek and efficient installation. For other inverters or stand-alone battery installation, the conduit box plugs should be installed.



SCAN FOR UPDATED

EG4 ELECTRONICS

SPECIFICATION SHEET

Davameter	TERS	ME	December ded Character Catt
Parameter			Recommended Charger Settings
Total Energy Capacity Voltage	14.3kWh @25C, 100% SOC 51.2V		-
Capacity	280Ah ±2%		e25°C ±2°C @ 0.5C
Charging Voltage (Bulk/Absorb)			56.2V (±0.2V)
Float	56.0V (±0.8V)		54V (±0.2V)
rtoat		-	47-45.6V
Low DC Cutoff	44.8V		(start higher, lower as needed)
Charge Current	100/140/200A		
	Max. Continuous**		60 - 160A
Discharge Current	200A Max. Continuous		160A
ENVIRONMENTAL PARAMETER			
Charging Range			32°F to ≈113°F (0°C to ≈45°
Discharging Range			-4°F to ≈122°F (-20°C to ≈50°
Storage Range			-4°F to ≈122°F (-20°C to ≈50°
Ingress Protection			IP6
CHARGING/DISCHARGING PAR	AMETERS		
Charge	Spec	Delay	Recovery
Cell Voltage Protection	3.8V	1 sec	3.45V
Module Voltage Protection	60V	1 sec	55.2V
Charge Over-Current 1	>205A	10 sec	-
Charge Over-Current 2	>225A	3 sec	-
	<23°F or >158°F		>32°F or <140°F
Temperature Protection	<-5°C or >70°C	1 sec	>0°C or <60°C
Discharge	Spec	Delay	Recovery
Cell Voltage Protection	2.3V	1 sec	3.1V
Module Voltage Protection	44.8V	1 sec	48V
Discharge Over-Current 1	>205A	10 sec	60 sec
Discharge Over-Current 2	>300A	3 sec	60 sec
Short Circuit	2000A	0.1 ms	-
Temperature Protection	<-4°F or >167°F	1 sec	>14°F or <149°F
·	<-20°C or >75°C	1 560	(>-10°C or <65°C)
PCB Temperature Protection	>230°F (>110°C)	1 sec	@ <176°F (<80°C)
GENERAL SPECIFICATIONS			
Parameter	S	pec	Condition
Cell Balance	120mA	Passive Balance	Cell Voltage Difference >40mV
Temperature Accuracy	3%	Cycle Measurement	Measure Range: t -40°F - ≈212°F (-40°C - ≈100°C)
Voltage Accuracy	0.5%	Cycle Measurement	
Current Accuracy	3%	Cycle Measurement	Moacuro Pango
SOC	5%		Integral Calculation
Power Consumption (Standby)	<300uA		Standby/Storage
Power Consumption (Operating)	<25mA		Charging/Discharging
Communication Ports	RS485/CAN		Customizable



EG4 ELECTRONICS

BATTERY HEATER SPECIFICATIONS				
Parameter	Spec	Condition		
Voltage	56V	-		
Power Consumption	224W	-		
Internal Battery Temperature	≤32°F (0°C) or ≥41°F (5°C)	Heat On/Heat Off		
PHYSICAL SPECIFICATIONS				
Dimensions $(H \times W \times D)$		$34.6 \times 22.3 \times 9.1$ in. (88 × 56.6 × 23.2cm)		
Weight		308.6 lbs. (140 kg)		
Design Life		>15 years		
Cycle Life		>8000 Cycles @ 0.5C 80% DOD		
Lifetime Production		82.6MWh*		

^{*(51.2}V×280Ah/1000×80%×8000 cycles/1000)90%=MWh



^{**}The default BMS in the module allows for 100A charging current maximum. To achieve higher charging currents, please contact your distributor for optional firmware files, or navigate to https://eg4electronics.com/downloads/ for the most up to date firmware.