

EG4[®] BRIGHTMOUNT ADJUSTABLE 90MPH/1100

CALCULATION REPORT

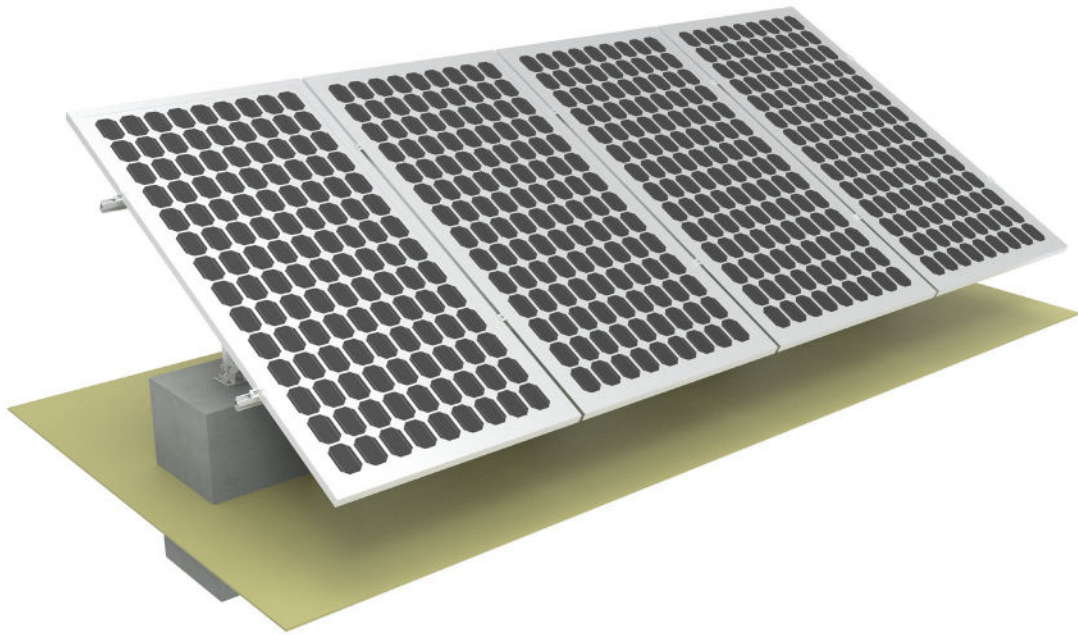


TABLE OF CONTENTS

1.	MATERIAL PARAMETERS.....	1
1.1	CHEMICAL COMPOSITION & MECHANICAL PROPERTIES OF AL-6005	1
1.2	CHEMICAL COMPOSITION & MECHANICAL PROPERTIES OF Q235B	1
1.3	CHEMICAL COMPOSITION & MECHANICAL PROPERTIES OF SUS304.....	1
2.	DESIGN BASIS & JUDGEMENT STANDARDS.....	2
2.1	STANDARD CODE	2
2.2	DESIGN CONDITIONS & TECHNICAL PARAMETERS.....	2
3.	BRACKET & CROSS SECTION	2
3.1	SKETCH OF BRACKET	2
3.2	CROSS SECTIONS OF MEMBERS.....	4
4.	LOAD CALCULATION	5
4.1	DEAD LOAD.....	5
4.2	SNOW LOAD.....	5
4.3	WIND LOAD	6
4.4	LOAD INSPECTION ITEM (ALLOWABLE STRESS DESIGN METHOD)	7
4.5	STRENGTH CALCULATION BASIS.....	7
5.	SAP2000 MODEL	7
6.	STRENGTH CALCULATION.....	9
6.1	AR55 RAIL	9
6.2	BEAM.....	13
6.3	COLUMN 1.....	17
6.4	COLUMN 2	21
6.5	SUMMARY	25
7.	WIND RESISTANCE CALCULATION OF CONCRETE FOUNDATION	25

1. MATERIAL PARAMETERS

1.1 CHEMICAL COMPOSITION & MECHANICAL PROPERTIES OF AL-6005

Elasticity modulus $E=69000$

Tensile/compressive/bending strength $f_y=240$ Mpa

CHEMICAL COMPOSITION	ELEMENT (%)								
	Mg	Si	Fe	Cu	Mn	Cr	Zn	Ti	A1
	0.4-0.6	0.6-0.9	≤ 0.35	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	Rem

MECHANICAL PROPERTIES	TENSILE TEST		
	Tensile Strength (N/mm ²)	Non-proportional Elongation Strength (N/mm ²)	Elongation after Break (%)
	≥ 260	≥ 240	≥ 8

1.2 CHEMICAL COMPOSITION & MECHANICAL PROPERTIES OF Q235B

CHEMICAL COMPOSITION	ELEMENT (%)				
	C	Si	Mn	S	P
	0.16	0.2	0.44	0.025	0.025

MECHANICAL PROPERTIES	TENSILE TEST		
	Tensile Strength (N/mm ²)	Non-proportional Elongation Strength (N/mm ²)	Elongation after Break (%)
	465	235	29.5

1.3 CHEMICAL COMPOSITION & MECHANICAL PROPERTIES OF SUS304

CHEMICAL COMPOSITION	ELEMENT (%)								
	C	Si	Mn	p	s	ni	cr	ti	Other
	≤ 0.08	≤ 1.0	≤ 2.0	≤ 0.5	≤ 0.045	8-10.5	18-20	≤ 0.25	

MECHANICAL PROPERTIES	TENSILE TEST		
	Test Thickness	Tensile Strength (N/mm ²)	Yield Strength
	$\leq 6\text{mm}$	≤ 700	≥ 206

2. DESIGN BASIS & JUDGEMENT STANDARDS

2.1 STANDARD CODE

ASCE 7-22

Minimum Design Loads for Building and Other Structures


2.2 DESIGN CONDITIONS & TECHNICAL PARAMETERS

Solar Panel	90.5 × 43.3 × 1.37 in. (2300 × 1100 × 35 mm)
Layout	1 × 4 × 1 / 1 × 8 × 1
Tilt Angle	40°
Span	51.2 in. (1300 mm)
Exposure category	C
Wind Speed	90 mph (40.4 m/s) (3s gust)
Snow Load	0.6 kN/m ²











3. BRACKET & CROSS SECTION

3.1 SKETCH OF BRACKET

Front View – 1 × 4 × 1

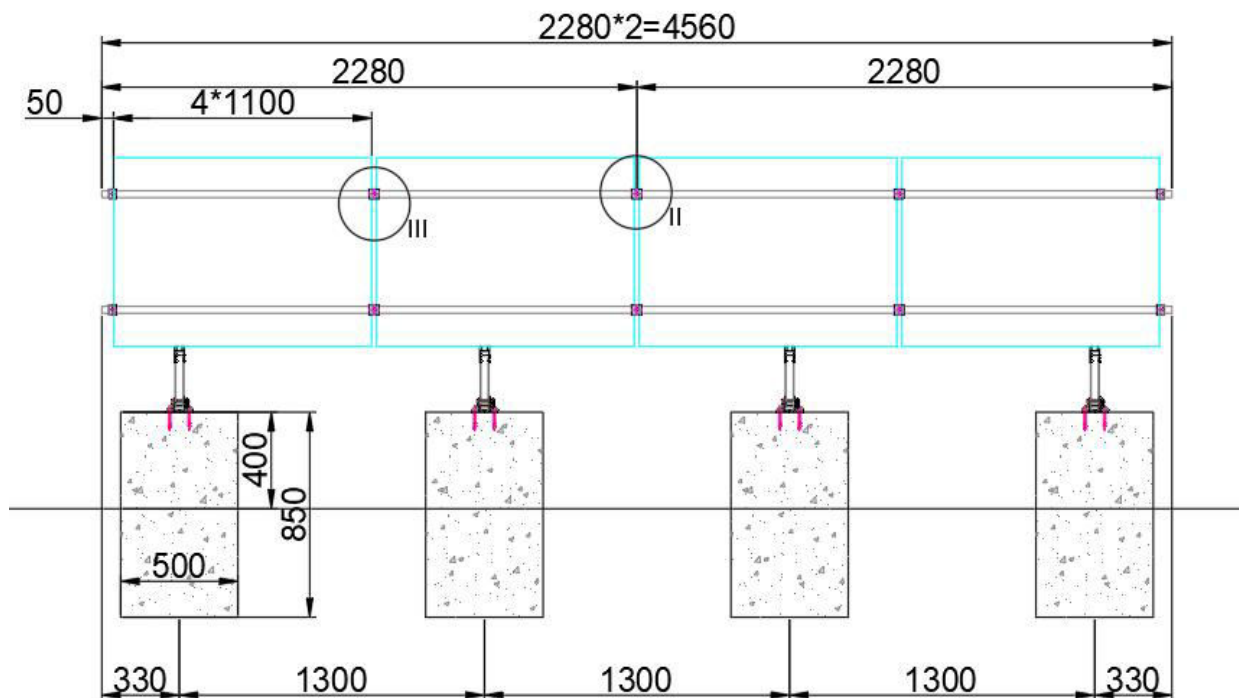

3.2 CROSS SECTIONS OF MEMBERS

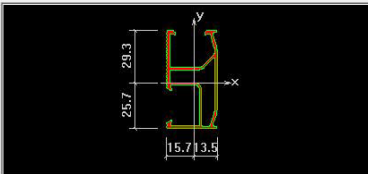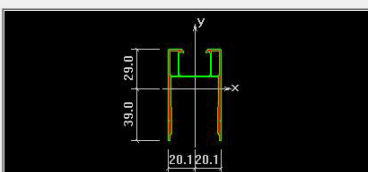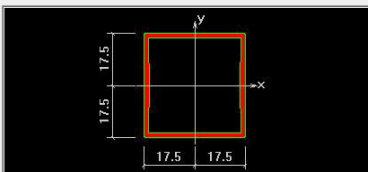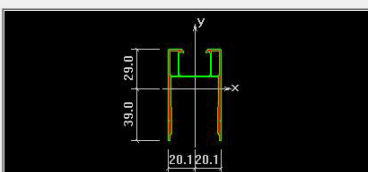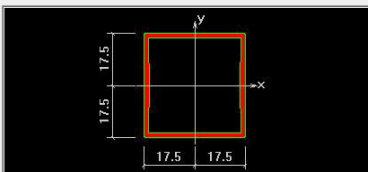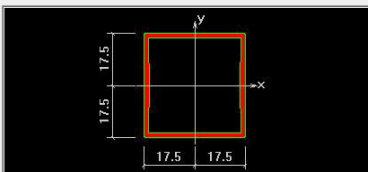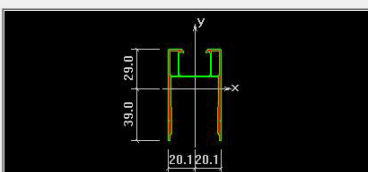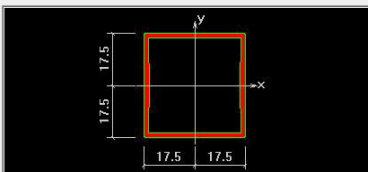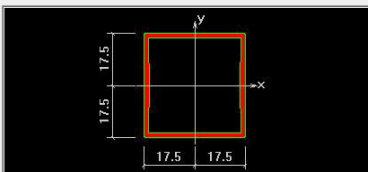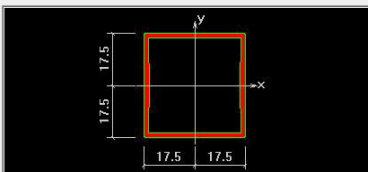MEMBER	CROSS-SECTIONS	PROPERTIES																																																																																																																																																																																																						
Rail	<table><tr><td>A</td><td>273.971035256493</td><td>Ip</td><td>114460.573763371</td></tr><tr><td>Ix</td><td>82055.1562447548</td><td>Wx(上)</td><td>2800.8930654394</td></tr><tr><td>Iy</td><td>32405.4175186157</td><td>Wx(下)</td><td>3191.89527925818</td></tr><tr><td>ix</td><td>17.3061559522673</td><td>Wy(左)</td><td>2062.62691206663</td></tr><tr><td>iy</td><td>10.8756816182951</td><td>Wy(右)</td><td>2402.10284994458</td></tr><tr><td>绕X轴面积矩</td><td>2002.2103098922</td><td>绕Y轴面积矩</td><td>1360.10062569586</td></tr><tr><td>左端离形心距离</td><td>15.710750853</td><td>右端离形心距离</td><td>13.4904371473367</td></tr><tr><td>上端离形心距离</td><td>29.296068906</td><td>下端离形心距离</td><td>25.7073459702679</td></tr><tr><td>主轴I1</td><td colspan="3">82429.617 (0.996, 0.086)</td></tr><tr><td>主轴I2</td><td colspan="3">32030.957 (-0.086, 0.996)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>274</td></tr><tr><td colspan="2">Ix</td><td>82055</td></tr><tr><td colspan="2">Iy</td><td>32405</td></tr><tr><td colspan="2">ix</td><td>17.3062</td></tr><tr><td colspan="2">iy</td><td>10.8757</td></tr><tr><td colspan="2">Wx</td><td>2800</td></tr><tr><td colspan="2">Wy</td><td>2062</td></tr><tr><td rowspan="7">Beam</td><td rowspan="7"> <table><tr><td>A</td><td>336.403499971997</td><td>Ip</td><td>239158.339699984</td></tr><tr><td>Ix</td><td>140245.169586182</td><td>Wx(上)</td><td>4833.98347274763</td></tr><tr><td>Iy</td><td>98913.170113802</td><td>Wx(下)</td><td>3597.1681229597</td></tr><tr><td>ix</td><td>20.4180236808395</td><td>Wy(左)</td><td>4933.3251925311</td></tr><tr><td>iy</td><td>17.147341915216</td><td>Wy(右)</td><td>4933.32519250598</td></tr><tr><td>绕X轴面积矩</td><td>3024.3009349690</td><td>绕Y轴面积矩</td><td>2790.97751358085</td></tr><tr><td>左端离形心距离</td><td>20.0500000000</td><td>右端离形心距离</td><td>20.0500000008224</td></tr><tr><td>上端离形心距离</td><td>29.012339487</td><td>下端离形心距离</td><td>38.9876605130121</td></tr><tr><td>主轴I1</td><td colspan="3">140245.170 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">98913.170 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>336</td></tr><tr><td colspan="2">Ix</td><td>140245</td></tr><tr><td colspan="2">Iy</td><td>98913</td></tr><tr><td colspan="2">ix</td><td>20.4180</td></tr><tr><td colspan="2">iy</td><td>17.1473</td></tr><tr><td colspan="2">Wx</td><td>3597</td></tr><tr><td colspan="2">Wy</td><td>4933</td></tr><tr><td rowspan="7">Column</td><td rowspan="7"> <table><tr><td>A</td><td>212.230530785648</td><td>Ip</td><td>78129.7493326664</td></tr><tr><td>Ix</td><td>37699.3379337788</td><td>Wx(上)</td><td>2154.2478819259</td></tr><tr><td>Iy</td><td>40430.4113988876</td><td>Wx(下)</td><td>2154.2478819345</td></tr><tr><td>ix</td><td>13.3279370104063</td><td>Wy(左)</td><td>2310.30922278565</td></tr><tr><td>iy</td><td>13.8022562829272</td><td>Wy(右)</td><td>2310.30922279382</td></tr><tr><td>绕X轴面积矩</td><td>1280.3480654625</td><td>绕Y轴面积矩</td><td>1351.43382263729</td></tr><tr><td>左端离形心距离</td><td>17.5000000000</td><td>右端离形心距离</td><td>17.4999999999982</td></tr><tr><td>上端离形心距离</td><td>17.5000000000</td><td>下端离形心距离</td><td>17.4999999999952</td></tr><tr><td>主轴I1</td><td colspan="3">37699.338 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">40430.411 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>212</td></tr><tr><td colspan="2">Ix</td><td>37699</td></tr><tr><td colspan="2">Iy</td><td>40430</td></tr><tr><td colspan="2">ix</td><td>13.3279</td></tr><tr><td colspan="2">iy</td><td>13.8023</td></tr><tr><td colspan="2">Wx</td><td>2154</td></tr><tr><td colspan="2">Wy</td><td>2310</td></tr></table> </td></tr></table> </td></tr></table>	A	273.971035256493	Ip	114460.573763371	Ix	82055.1562447548	Wx(上)	2800.8930654394	Iy	32405.4175186157	Wx(下)	3191.89527925818	ix	17.3061559522673	Wy(左)	2062.62691206663	iy	10.8756816182951	Wy(右)	2402.10284994458	绕X轴面积矩	2002.2103098922	绕Y轴面积矩	1360.10062569586	左端离形心距离	15.710750853	右端离形心距离	13.4904371473367	上端离形心距离	29.296068906	下端离形心距离	25.7073459702679	主轴I1	82429.617 (0.996, 0.086)			主轴I2	32030.957 (-0.086, 0.996)			 绘三维图 绘参数表 改背景色  加入截面库 关闭				A		274	Ix		82055	Iy		32405	ix		17.3062	iy		10.8757	Wx		2800	Wy		2062	Beam	<table><tr><td>A</td><td>336.403499971997</td><td>Ip</td><td>239158.339699984</td></tr><tr><td>Ix</td><td>140245.169586182</td><td>Wx(上)</td><td>4833.98347274763</td></tr><tr><td>Iy</td><td>98913.170113802</td><td>Wx(下)</td><td>3597.1681229597</td></tr><tr><td>ix</td><td>20.4180236808395</td><td>Wy(左)</td><td>4933.3251925311</td></tr><tr><td>iy</td><td>17.147341915216</td><td>Wy(右)</td><td>4933.32519250598</td></tr><tr><td>绕X轴面积矩</td><td>3024.3009349690</td><td>绕Y轴面积矩</td><td>2790.97751358085</td></tr><tr><td>左端离形心距离</td><td>20.0500000000</td><td>右端离形心距离</td><td>20.0500000008224</td></tr><tr><td>上端离形心距离</td><td>29.012339487</td><td>下端离形心距离</td><td>38.9876605130121</td></tr><tr><td>主轴I1</td><td colspan="3">140245.170 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">98913.170 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>336</td></tr><tr><td colspan="2">Ix</td><td>140245</td></tr><tr><td colspan="2">Iy</td><td>98913</td></tr><tr><td colspan="2">ix</td><td>20.4180</td></tr><tr><td colspan="2">iy</td><td>17.1473</td></tr><tr><td colspan="2">Wx</td><td>3597</td></tr><tr><td colspan="2">Wy</td><td>4933</td></tr><tr><td rowspan="7">Column</td><td rowspan="7"> <table><tr><td>A</td><td>212.230530785648</td><td>Ip</td><td>78129.7493326664</td></tr><tr><td>Ix</td><td>37699.3379337788</td><td>Wx(上)</td><td>2154.2478819259</td></tr><tr><td>Iy</td><td>40430.4113988876</td><td>Wx(下)</td><td>2154.2478819345</td></tr><tr><td>ix</td><td>13.3279370104063</td><td>Wy(左)</td><td>2310.30922278565</td></tr><tr><td>iy</td><td>13.8022562829272</td><td>Wy(右)</td><td>2310.30922279382</td></tr><tr><td>绕X轴面积矩</td><td>1280.3480654625</td><td>绕Y轴面积矩</td><td>1351.43382263729</td></tr><tr><td>左端离形心距离</td><td>17.5000000000</td><td>右端离形心距离</td><td>17.4999999999982</td></tr><tr><td>上端离形心距离</td><td>17.5000000000</td><td>下端离形心距离</td><td>17.4999999999952</td></tr><tr><td>主轴I1</td><td colspan="3">37699.338 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">40430.411 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>212</td></tr><tr><td colspan="2">Ix</td><td>37699</td></tr><tr><td colspan="2">Iy</td><td>40430</td></tr><tr><td colspan="2">ix</td><td>13.3279</td></tr><tr><td colspan="2">iy</td><td>13.8023</td></tr><tr><td colspan="2">Wx</td><td>2154</td></tr><tr><td colspan="2">Wy</td><td>2310</td></tr></table> </td></tr></table>	A	336.403499971997	Ip	239158.339699984	Ix	140245.169586182	Wx(上)	4833.98347274763	Iy	98913.170113802	Wx(下)	3597.1681229597	ix	20.4180236808395	Wy(左)	4933.3251925311	iy	17.147341915216	Wy(右)	4933.32519250598	绕X轴面积矩	3024.3009349690	绕Y轴面积矩	2790.97751358085	左端离形心距离	20.0500000000	右端离形心距离	20.0500000008224	上端离形心距离	29.012339487	下端离形心距离	38.9876605130121	主轴I1	140245.170 (1.000, 0.000)			主轴I2	98913.170 (0.000, 1.000)			 绘三维图 绘参数表 改背景色  加入截面库 关闭				A		336	Ix		140245	Iy		98913	ix		20.4180	iy		17.1473	Wx		3597	Wy		4933	Column	<table><tr><td>A</td><td>212.230530785648</td><td>Ip</td><td>78129.7493326664</td></tr><tr><td>Ix</td><td>37699.3379337788</td><td>Wx(上)</td><td>2154.2478819259</td></tr><tr><td>Iy</td><td>40430.4113988876</td><td>Wx(下)</td><td>2154.2478819345</td></tr><tr><td>ix</td><td>13.3279370104063</td><td>Wy(左)</td><td>2310.30922278565</td></tr><tr><td>iy</td><td>13.8022562829272</td><td>Wy(右)</td><td>2310.30922279382</td></tr><tr><td>绕X轴面积矩</td><td>1280.3480654625</td><td>绕Y轴面积矩</td><td>1351.43382263729</td></tr><tr><td>左端离形心距离</td><td>17.5000000000</td><td>右端离形心距离</td><td>17.4999999999982</td></tr><tr><td>上端离形心距离</td><td>17.5000000000</td><td>下端离形心距离</td><td>17.4999999999952</td></tr><tr><td>主轴I1</td><td colspan="3">37699.338 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">40430.411 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>212</td></tr><tr><td colspan="2">Ix</td><td>37699</td></tr><tr><td colspan="2">Iy</td><td>40430</td></tr><tr><td colspan="2">ix</td><td>13.3279</td></tr><tr><td colspan="2">iy</td><td>13.8023</td></tr><tr><td colspan="2">Wx</td><td>2154</td></tr><tr><td colspan="2">Wy</td><td>2310</td></tr></table>	A	212.230530785648	Ip	78129.7493326664	Ix	37699.3379337788	Wx(上)	2154.2478819259	Iy	40430.4113988876	Wx(下)	2154.2478819345	ix	13.3279370104063	Wy(左)	2310.30922278565	iy	13.8022562829272	Wy(右)	2310.30922279382	绕X轴面积矩	1280.3480654625	绕Y轴面积矩	1351.43382263729	左端离形心距离	17.5000000000	右端离形心距离	17.4999999999982	上端离形心距离	17.5000000000	下端离形心距离	17.4999999999952	主轴I1	37699.338 (1.000, 0.000)			主轴I2	40430.411 (0.000, 1.000)			 绘三维图 绘参数表 改背景色  加入截面库 关闭				A		212	Ix		37699	Iy		40430	ix		13.3279	iy		13.8023	Wx		2154	Wy		2310
		A	273.971035256493	Ip	114460.573763371																																																																																																																																																																																																			
		Ix	82055.1562447548	Wx(上)	2800.8930654394																																																																																																																																																																																																			
		Iy	32405.4175186157	Wx(下)	3191.89527925818																																																																																																																																																																																																			
		ix	17.3061559522673	Wy(左)	2062.62691206663																																																																																																																																																																																																			
		iy	10.8756816182951	Wy(右)	2402.10284994458																																																																																																																																																																																																			
		绕X轴面积矩	2002.2103098922	绕Y轴面积矩	1360.10062569586																																																																																																																																																																																																			
左端离形心距离	15.710750853	右端离形心距离	13.4904371473367																																																																																																																																																																																																					
上端离形心距离	29.296068906	下端离形心距离	25.7073459702679																																																																																																																																																																																																					
主轴I1	82429.617 (0.996, 0.086)																																																																																																																																																																																																							
主轴I2	32030.957 (-0.086, 0.996)																																																																																																																																																																																																							
 绘三维图 绘参数表 改背景色  加入截面库 关闭																																																																																																																																																																																																								
A		274																																																																																																																																																																																																						
Ix		82055																																																																																																																																																																																																						
Iy		32405																																																																																																																																																																																																						
ix		17.3062																																																																																																																																																																																																						
iy		10.8757																																																																																																																																																																																																						
Wx		2800																																																																																																																																																																																																						
Wy		2062																																																																																																																																																																																																						
Beam	<table><tr><td>A</td><td>336.403499971997</td><td>Ip</td><td>239158.339699984</td></tr><tr><td>Ix</td><td>140245.169586182</td><td>Wx(上)</td><td>4833.98347274763</td></tr><tr><td>Iy</td><td>98913.170113802</td><td>Wx(下)</td><td>3597.1681229597</td></tr><tr><td>ix</td><td>20.4180236808395</td><td>Wy(左)</td><td>4933.3251925311</td></tr><tr><td>iy</td><td>17.147341915216</td><td>Wy(右)</td><td>4933.32519250598</td></tr><tr><td>绕X轴面积矩</td><td>3024.3009349690</td><td>绕Y轴面积矩</td><td>2790.97751358085</td></tr><tr><td>左端离形心距离</td><td>20.0500000000</td><td>右端离形心距离</td><td>20.0500000008224</td></tr><tr><td>上端离形心距离</td><td>29.012339487</td><td>下端离形心距离</td><td>38.9876605130121</td></tr><tr><td>主轴I1</td><td colspan="3">140245.170 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">98913.170 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>336</td></tr><tr><td colspan="2">Ix</td><td>140245</td></tr><tr><td colspan="2">Iy</td><td>98913</td></tr><tr><td colspan="2">ix</td><td>20.4180</td></tr><tr><td colspan="2">iy</td><td>17.1473</td></tr><tr><td colspan="2">Wx</td><td>3597</td></tr><tr><td colspan="2">Wy</td><td>4933</td></tr><tr><td rowspan="7">Column</td><td rowspan="7"> <table><tr><td>A</td><td>212.230530785648</td><td>Ip</td><td>78129.7493326664</td></tr><tr><td>Ix</td><td>37699.3379337788</td><td>Wx(上)</td><td>2154.2478819259</td></tr><tr><td>Iy</td><td>40430.4113988876</td><td>Wx(下)</td><td>2154.2478819345</td></tr><tr><td>ix</td><td>13.3279370104063</td><td>Wy(左)</td><td>2310.30922278565</td></tr><tr><td>iy</td><td>13.8022562829272</td><td>Wy(右)</td><td>2310.30922279382</td></tr><tr><td>绕X轴面积矩</td><td>1280.3480654625</td><td>绕Y轴面积矩</td><td>1351.43382263729</td></tr><tr><td>左端离形心距离</td><td>17.5000000000</td><td>右端离形心距离</td><td>17.4999999999982</td></tr><tr><td>上端离形心距离</td><td>17.5000000000</td><td>下端离形心距离</td><td>17.4999999999952</td></tr><tr><td>主轴I1</td><td colspan="3">37699.338 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">40430.411 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>212</td></tr><tr><td colspan="2">Ix</td><td>37699</td></tr><tr><td colspan="2">Iy</td><td>40430</td></tr><tr><td colspan="2">ix</td><td>13.3279</td></tr><tr><td colspan="2">iy</td><td>13.8023</td></tr><tr><td colspan="2">Wx</td><td>2154</td></tr><tr><td colspan="2">Wy</td><td>2310</td></tr></table> </td></tr></table>	A	336.403499971997	Ip	239158.339699984	Ix	140245.169586182	Wx(上)	4833.98347274763	Iy	98913.170113802	Wx(下)	3597.1681229597	ix	20.4180236808395	Wy(左)	4933.3251925311	iy	17.147341915216	Wy(右)	4933.32519250598	绕X轴面积矩	3024.3009349690	绕Y轴面积矩	2790.97751358085	左端离形心距离	20.0500000000	右端离形心距离	20.0500000008224	上端离形心距离	29.012339487	下端离形心距离	38.9876605130121	主轴I1	140245.170 (1.000, 0.000)			主轴I2	98913.170 (0.000, 1.000)			 绘三维图 绘参数表 改背景色  加入截面库 关闭				A		336	Ix		140245	Iy		98913	ix		20.4180	iy		17.1473	Wx		3597	Wy		4933	Column	<table><tr><td>A</td><td>212.230530785648</td><td>Ip</td><td>78129.7493326664</td></tr><tr><td>Ix</td><td>37699.3379337788</td><td>Wx(上)</td><td>2154.2478819259</td></tr><tr><td>Iy</td><td>40430.4113988876</td><td>Wx(下)</td><td>2154.2478819345</td></tr><tr><td>ix</td><td>13.3279370104063</td><td>Wy(左)</td><td>2310.30922278565</td></tr><tr><td>iy</td><td>13.8022562829272</td><td>Wy(右)</td><td>2310.30922279382</td></tr><tr><td>绕X轴面积矩</td><td>1280.3480654625</td><td>绕Y轴面积矩</td><td>1351.43382263729</td></tr><tr><td>左端离形心距离</td><td>17.5000000000</td><td>右端离形心距离</td><td>17.4999999999982</td></tr><tr><td>上端离形心距离</td><td>17.5000000000</td><td>下端离形心距离</td><td>17.4999999999952</td></tr><tr><td>主轴I1</td><td colspan="3">37699.338 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">40430.411 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>212</td></tr><tr><td colspan="2">Ix</td><td>37699</td></tr><tr><td colspan="2">Iy</td><td>40430</td></tr><tr><td colspan="2">ix</td><td>13.3279</td></tr><tr><td colspan="2">iy</td><td>13.8023</td></tr><tr><td colspan="2">Wx</td><td>2154</td></tr><tr><td colspan="2">Wy</td><td>2310</td></tr></table>	A	212.230530785648	Ip	78129.7493326664	Ix	37699.3379337788	Wx(上)	2154.2478819259	Iy	40430.4113988876	Wx(下)	2154.2478819345	ix	13.3279370104063	Wy(左)	2310.30922278565	iy	13.8022562829272	Wy(右)	2310.30922279382	绕X轴面积矩	1280.3480654625	绕Y轴面积矩	1351.43382263729	左端离形心距离	17.5000000000	右端离形心距离	17.4999999999982	上端离形心距离	17.5000000000	下端离形心距离	17.4999999999952	主轴I1	37699.338 (1.000, 0.000)			主轴I2	40430.411 (0.000, 1.000)			 绘三维图 绘参数表 改背景色  加入截面库 关闭				A		212	Ix		37699	Iy		40430	ix		13.3279	iy		13.8023	Wx		2154	Wy		2310																																																																			
		A	336.403499971997	Ip	239158.339699984																																																																																																																																																																																																			
		Ix	140245.169586182	Wx(上)	4833.98347274763																																																																																																																																																																																																			
		Iy	98913.170113802	Wx(下)	3597.1681229597																																																																																																																																																																																																			
		ix	20.4180236808395	Wy(左)	4933.3251925311																																																																																																																																																																																																			
		iy	17.147341915216	Wy(右)	4933.32519250598																																																																																																																																																																																																			
		绕X轴面积矩	3024.3009349690	绕Y轴面积矩	2790.97751358085																																																																																																																																																																																																			
左端离形心距离	20.0500000000	右端离形心距离	20.0500000008224																																																																																																																																																																																																					
上端离形心距离	29.012339487	下端离形心距离	38.9876605130121																																																																																																																																																																																																					
主轴I1	140245.170 (1.000, 0.000)																																																																																																																																																																																																							
主轴I2	98913.170 (0.000, 1.000)																																																																																																																																																																																																							
 绘三维图 绘参数表 改背景色  加入截面库 关闭																																																																																																																																																																																																								
A		336																																																																																																																																																																																																						
Ix		140245																																																																																																																																																																																																						
Iy		98913																																																																																																																																																																																																						
ix		20.4180																																																																																																																																																																																																						
iy		17.1473																																																																																																																																																																																																						
Wx		3597																																																																																																																																																																																																						
Wy		4933																																																																																																																																																																																																						
Column	<table><tr><td>A</td><td>212.230530785648</td><td>Ip</td><td>78129.7493326664</td></tr><tr><td>Ix</td><td>37699.3379337788</td><td>Wx(上)</td><td>2154.2478819259</td></tr><tr><td>Iy</td><td>40430.4113988876</td><td>Wx(下)</td><td>2154.2478819345</td></tr><tr><td>ix</td><td>13.3279370104063</td><td>Wy(左)</td><td>2310.30922278565</td></tr><tr><td>iy</td><td>13.8022562829272</td><td>Wy(右)</td><td>2310.30922279382</td></tr><tr><td>绕X轴面积矩</td><td>1280.3480654625</td><td>绕Y轴面积矩</td><td>1351.43382263729</td></tr><tr><td>左端离形心距离</td><td>17.5000000000</td><td>右端离形心距离</td><td>17.4999999999982</td></tr><tr><td>上端离形心距离</td><td>17.5000000000</td><td>下端离形心距离</td><td>17.4999999999952</td></tr><tr><td>主轴I1</td><td colspan="3">37699.338 (1.000, 0.000)</td></tr><tr><td>主轴I2</td><td colspan="3">40430.411 (0.000, 1.000)</td></tr><tr><td colspan="4">  绘三维图 绘参数表 改背景色  加入截面库 关闭 </td></tr><tr><td colspan="2">A</td><td>212</td></tr><tr><td colspan="2">Ix</td><td>37699</td></tr><tr><td colspan="2">Iy</td><td>40430</td></tr><tr><td colspan="2">ix</td><td>13.3279</td></tr><tr><td colspan="2">iy</td><td>13.8023</td></tr><tr><td colspan="2">Wx</td><td>2154</td></tr><tr><td colspan="2">Wy</td><td>2310</td></tr></table>	A	212.230530785648	Ip	78129.7493326664	Ix	37699.3379337788	Wx(上)	2154.2478819259	Iy	40430.4113988876	Wx(下)	2154.2478819345	ix	13.3279370104063	Wy(左)	2310.30922278565	iy	13.8022562829272	Wy(右)	2310.30922279382	绕X轴面积矩	1280.3480654625	绕Y轴面积矩	1351.43382263729	左端离形心距离	17.5000000000	右端离形心距离	17.4999999999982	上端离形心距离	17.5000000000	下端离形心距离	17.4999999999952	主轴I1	37699.338 (1.000, 0.000)			主轴I2	40430.411 (0.000, 1.000)			 绘三维图 绘参数表 改背景色  加入截面库 关闭				A		212	Ix		37699	Iy		40430	ix		13.3279	iy		13.8023	Wx		2154	Wy		2310																																																																																																																																						
		A	212.230530785648	Ip	78129.7493326664																																																																																																																																																																																																			
		Ix	37699.3379337788	Wx(上)	2154.2478819259																																																																																																																																																																																																			
		Iy	40430.4113988876	Wx(下)	2154.2478819345																																																																																																																																																																																																			
		ix	13.3279370104063	Wy(左)	2310.30922278565																																																																																																																																																																																																			
		iy	13.8022562829272	Wy(右)	2310.30922279382																																																																																																																																																																																																			
		绕X轴面积矩	1280.3480654625	绕Y轴面积矩	1351.43382263729																																																																																																																																																																																																			
左端离形心距离	17.5000000000	右端离形心距离	17.4999999999982																																																																																																																																																																																																					
上端离形心距离	17.5000000000	下端离形心距离	17.4999999999952																																																																																																																																																																																																					
主轴I1	37699.338 (1.000, 0.000)																																																																																																																																																																																																							
主轴I2	40430.411 (0.000, 1.000)																																																																																																																																																																																																							
 绘三维图 绘参数表 改背景色  加入截面库 关闭																																																																																																																																																																																																								
A		212																																																																																																																																																																																																						
Ix		37699																																																																																																																																																																																																						
Iy		40430																																																																																																																																																																																																						
ix		13.3279																																																																																																																																																																																																						
iy		13.8023																																																																																																																																																																																																						
Wx		2154																																																																																																																																																																																																						
Wy		2310																																																																																																																																																																																																						

4. LOAD CALCULATION

4.1 DEAD LOAD

Solar Panel

Weight 30 kg (one panel)

Dead-weight of panel $G1 = 30 \times 9.8 \times 4$
 $= 1176 \text{ N}$

Rail AR55 AL6005-T5

Dead-weight of Rail $G2 = 66.60 \text{ N}$

Dead load $= G1 + G2 = 1243 \text{ N}$

4.2 SNOW LOAD

Snow pressure shall be calculated in the following formula:

The flat roof snow load, p_f , shall be calculated in lb/ft^2 (kN/m^2) using the following formula:

Formula: $p_f = 0.7 C_E C_t P_g$		
Flat surface snow load	$p_f = 0.7 \times C_e \times C_t \times P_g$	Based on ASCE/SEI 7-22 7.3 Table 7.3-1
	$= 0.7 \times 0.9 \times 1.2 \times 500$	
	$= 454 \text{ kN/m}^2$	

Where:

Exposure Factor $C_E = 0.9$	Based on ASCE/SEI 7-22 7.3 Table 7.3-1
Thermal Factor $C_t = 1.2$	Based on ASCE/SEI 7-22 7.3 Table 7.3-2
Ground snow loads $P_g = 600 \text{ N/m}^2$	Based on ASCE/SEI 7-22 7.2 Table 7.2-1

Snow loads acting on a sloping surface shall be assumed to act on the horizontal projection of that surface. The sloped roof (balanced) snow load, p_s , shall be obtained by multiplying the flat roof snow load, p_f , by the roof slope factor, C_s :

Formula: $p_s = C_s P_f$		
Sloped Snow Load	$p_s = C_s \times P_f$	Based on ASCE/SEI 7-22 7.4 Table 7.4-1
	$= 0.54 \times 378$	
	$= 245 \text{ N/m}^2$	

Where:

Slope Factor $C_s = 0.54$	
Module area $A = 2.3 \times 1.100 \times 4$	
$= 10.12 \text{ m}^2$	Based on ASCE/SEI 7-22 7.4 Table 7.4-1
$F_s = p_s \times A$	
$= 2478.83 \text{ N}$	

4.3 WIND LOAD

Wind pressure at height Z point shall be calculated in the following formula:

26.10.2 Velocity Pressure – Velocity pressure, q_z , evaluated at height z above ground shall be calculated by the following equation:

Velocity Pressure	$q_z = 0.00256K_zK_{zt}K_eV^2$ (lb/ft ²); V, mi/h
	$q_z = 0.613K_zK_{zt}K_eV^2$ (N/m ²); V, m/s
	$q_z = 0.613 \times 0.85 \times 1 \times 1 (40.4)^2 = 850.44$ N/m ²

Variation coefficient of wind pressure and height $K_z = 0.85$

Based on ASCE/SEI 7-22 Table 26.10-1

Where: Landform coefficient $K_{zt} = 1$

Based on ASCE/SEI 7-22 Table 26.9-1

Ground Elevation Factor $K_e = 1$

Based on ASCE/SEI 7-22 Table 26.6-1

Basic wind velocity $V = 40.4$ m/s

27.3.2 Open Buildings with Monoslope, Pitched, or Troughed Free Roofs – The net design pressure for the MWFRS of open buildings with monoslope, pitched, or troughed free roofs in lbs/ft² (N/m²), shall be determined by equation:

Formula: $p = q_z K_d G C_N$		
Design Wind Pressure	$p = q_z \times K_d \times G \times C_N$	Based on ASCE/SEI 7-22 Table 7.4-1
	$q_z \times K_d \times G \times C_{N1} = 1640.56$ N/m ²	windward
	$q_z \times K_d \times G \times C_{N2} = 1456.22$ N/m ²	leeward

Wind pressure at Af form center Z point
 $q_z = 850.44$ N/m²

Based on ASCE/SEI 7-22 Table 26.10-1

Gust-effect Factor $G = 0.85$

Based on ASCE/SEI 7-22 Table 26.11.1

Where: Wind load shape coefficient $C_{N1} = 2.67$

Based on ASCE/SEI 7-22 Table 27.3-4

Wind load shape coefficient $C_{N2} = 2.37$

Based on ASCE/SEI 7-22 Table 27.3-4

Directionality Factor $K_d = 0.85$

Based on ASCE/SEI 7-22 Table 26.6-1

Fw-windward = 16602.43 N

Fw-leeward = 14736.99 N

4.4 LOAD INSPECTION ITEM (ALLOWABLE STRESS DESIGN METHOD)

Loads listed in this section shall be considered to act in the following combinations, which will produce the most disadvantage in the building, foundation, or structural member being considered. Effects of one or more loads not acting shall be considered.

1. D
2. D+L
3. D+ (L or S or R)
4. D+0.75L+0.75 (L or S or R)
5. D+ (0.6W or 0.7E)
6. D+0.75L+0.75 (0.6W) +0.75 (L or S or R)
7. D+0.75L+0.75 (0.7E) +0.75S
8. 0.6D+0.6W
9. 0.6D+0.7E

SYMBOLS	DESCRIPTION
D	Dead load
L	Live load
S	Snow load
W	Wind load
R	Rain load
E	Earthquake load

Load Combination


COM1	D+S	
COM2	D+0.6*W-windard	Wind compression load
COM3	D+0.75 (0.6W-windard) +0.75S	Wind compression load
COM4	0.6*D+0.6W-leeward	Wind uplift load

4.5 STRENGTH CALCULATION BASIS


D=	1242.60	N	
F _S =	2478.83	N	
F _{w-windard} =	16602.43	N	
F _{w-leeward} =	14736.99	N	
q-D=	0.136	N/mm	Dead load liner density
q-S=	0.272	N/mm	Dead load liner density
q-windard=	1.820	N/mm	Wind positive load linear density
q-leeward=	1.616	N/mm	Wind negative load linear density

5. SAP2000 MODEL


Load pattern: Dead load q-D=0.136 N/mm

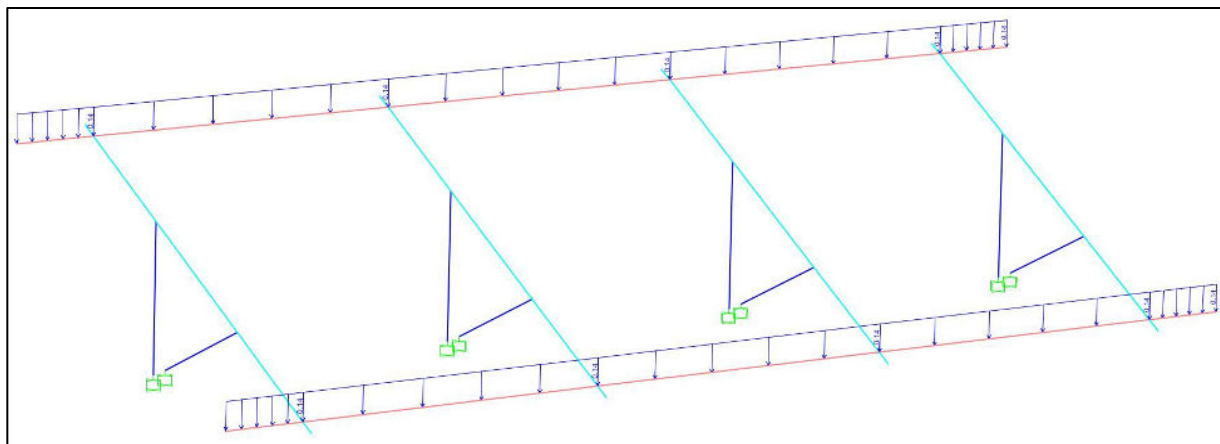


Load pattern: Snow load $q-S=0.272 \text{ N/m}$

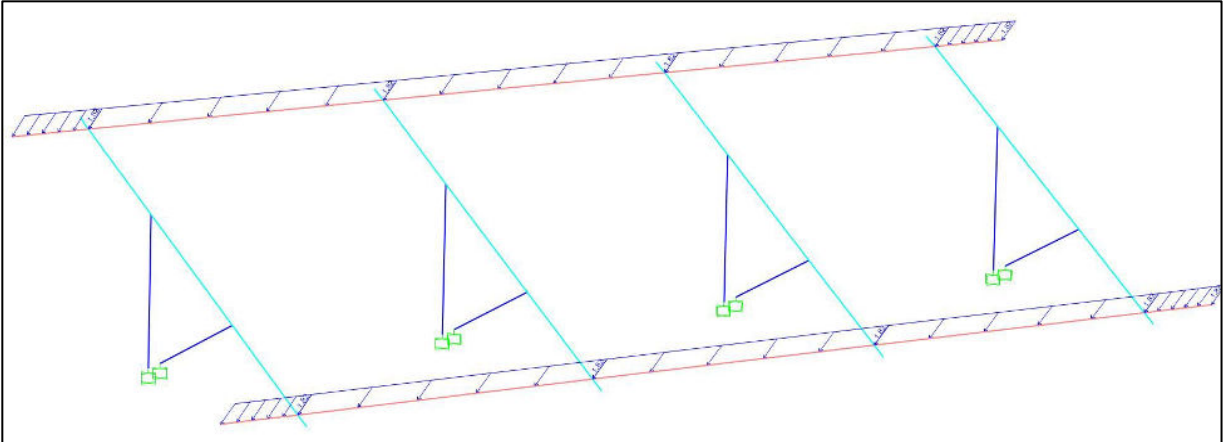

Load pattern: Windload-windward $q\text{-windard}=-1.820 \text{ N/mm}$

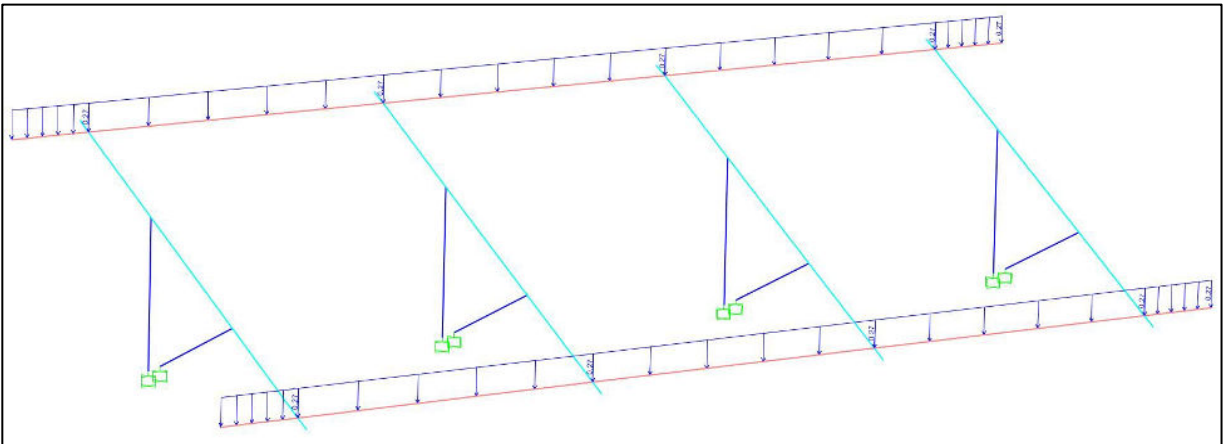




Load pattern: Windload-leeward $q\text{-leeward}=1.616 \text{ N/mm}$

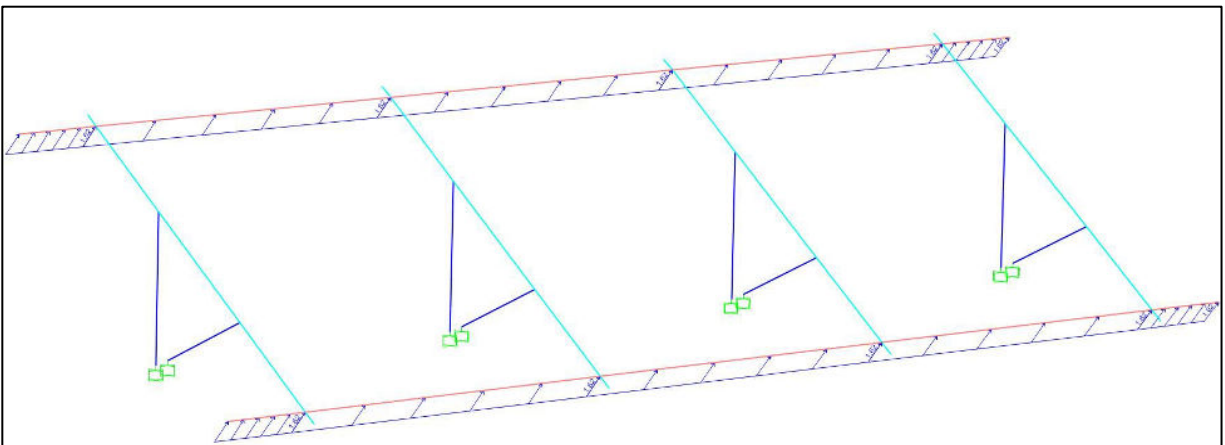

6. STRENGTH CALCULATION




6.1 AR55 RAIL

COM1 D+S bending moment

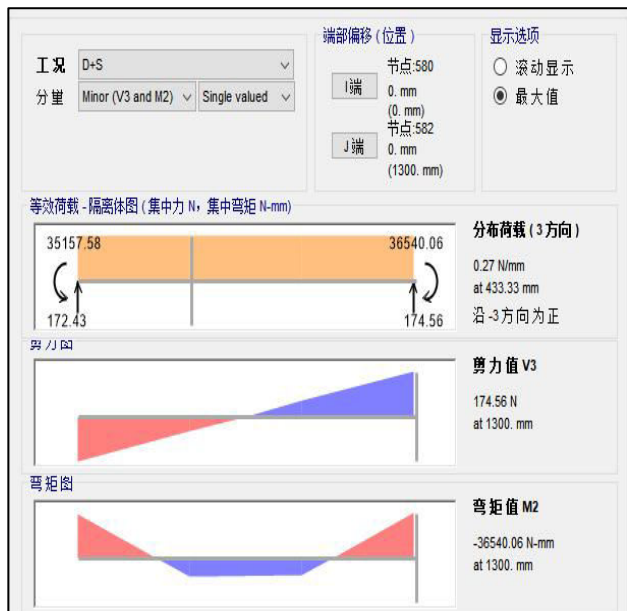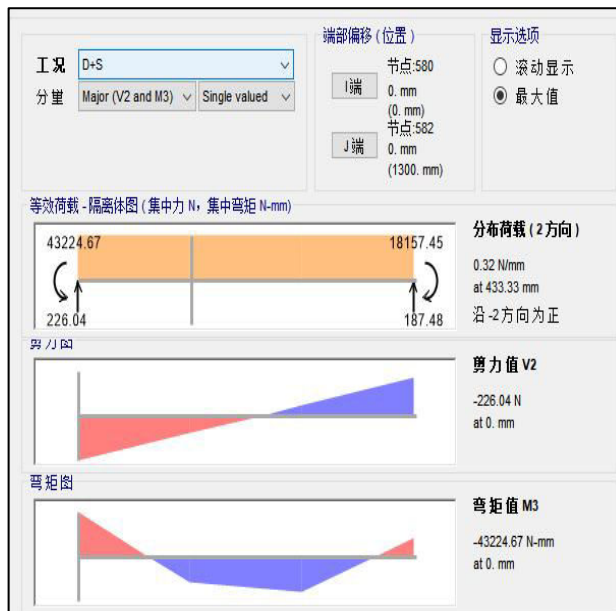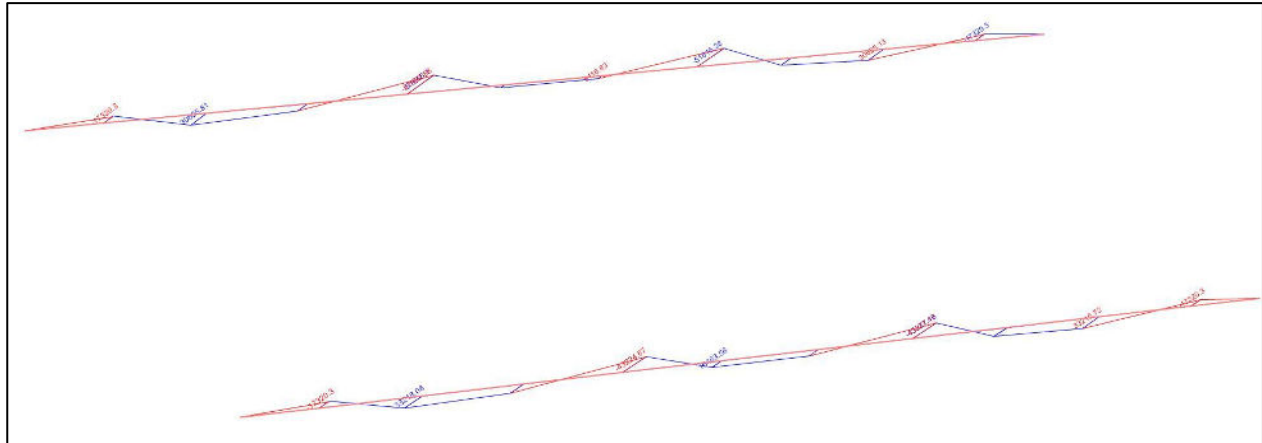




$$\begin{aligned}
 M3 &= 43224 \text{ N.mm} \\
 M2 &= 36540 \text{ N.mm} \\
 M3/Wx + M2/Wy &= 33.16 \text{ Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

COM2 D+0.6*W-windard bending moment

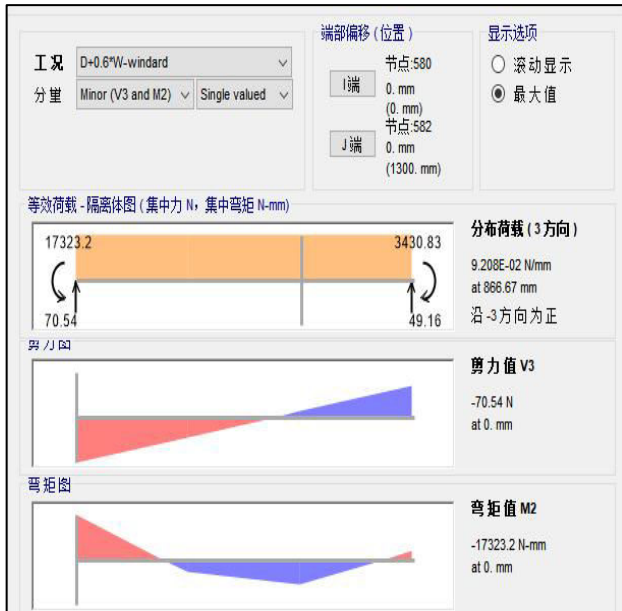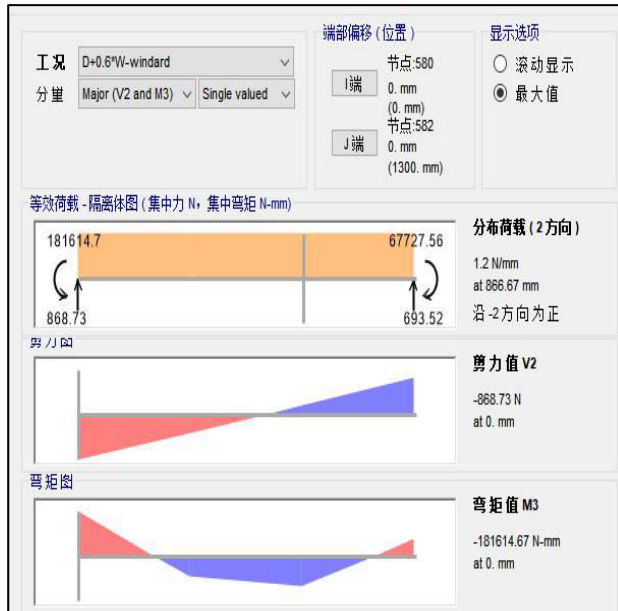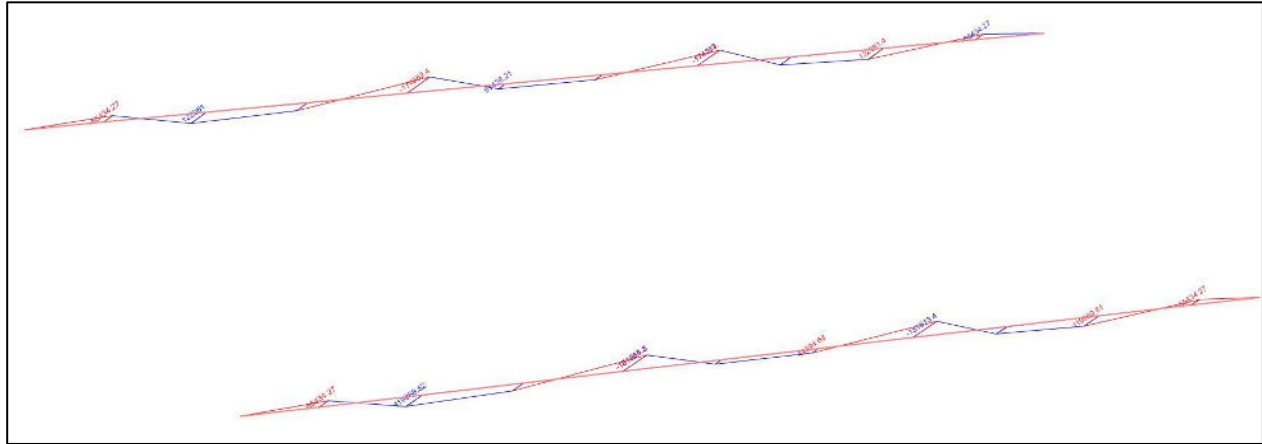



$$\begin{aligned}
 M3 &= 181614 \text{ N.mm} \\
 M2 &= 17323 \text{ N.mm} \\
 M3/W_x + M2/W_y &= 73.26 \text{ Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

COM3 D+0.75 (0.6W-windard) +0.75S bending moment

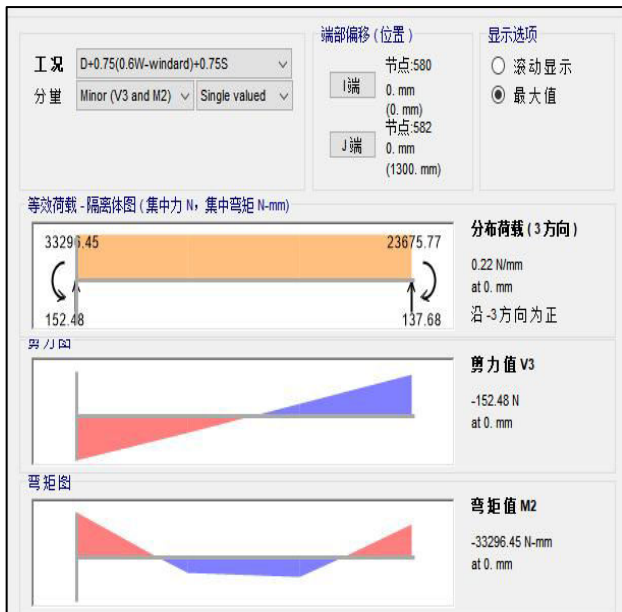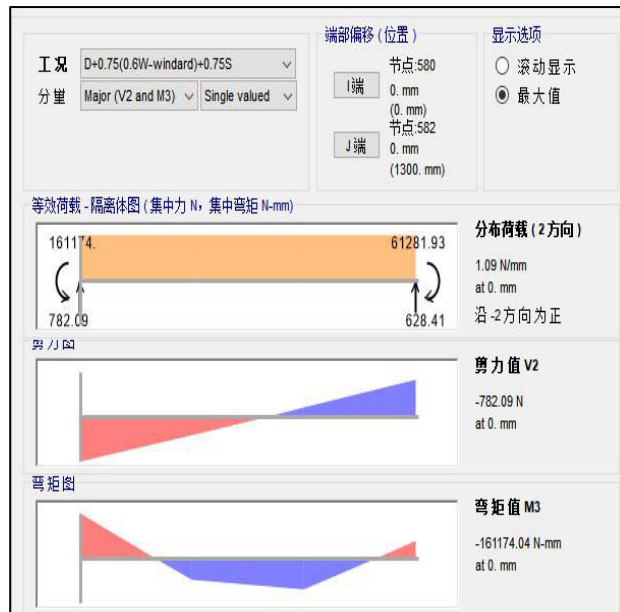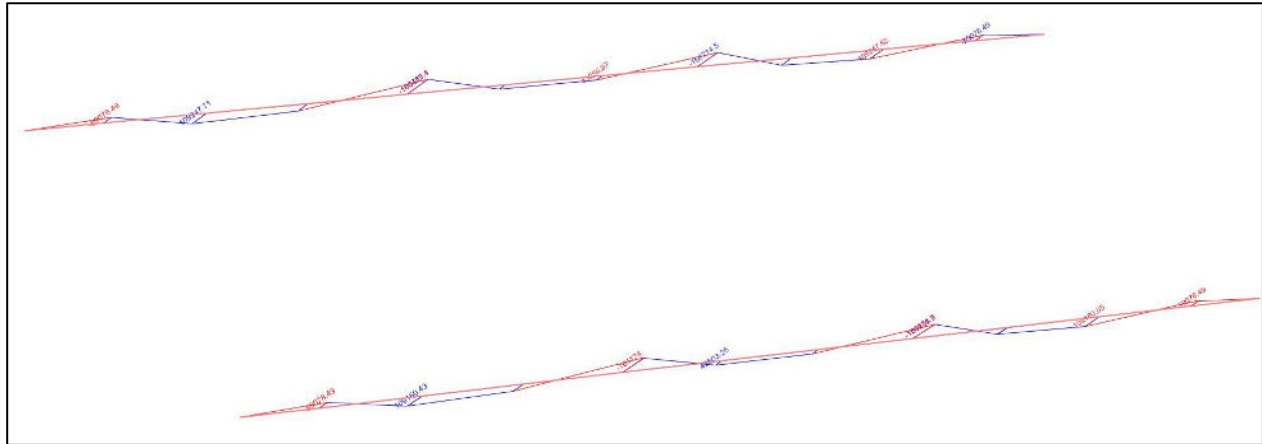

$$\begin{aligned}
 M3 &= 161174 \text{ N.mm} \\
 M2 &= 33296 \text{ N.mm} \\
 M3/W_x + M2/W_y &= 73.71 \text{ Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$



COM4 0.6D+0.6*W-Leeward bending moment

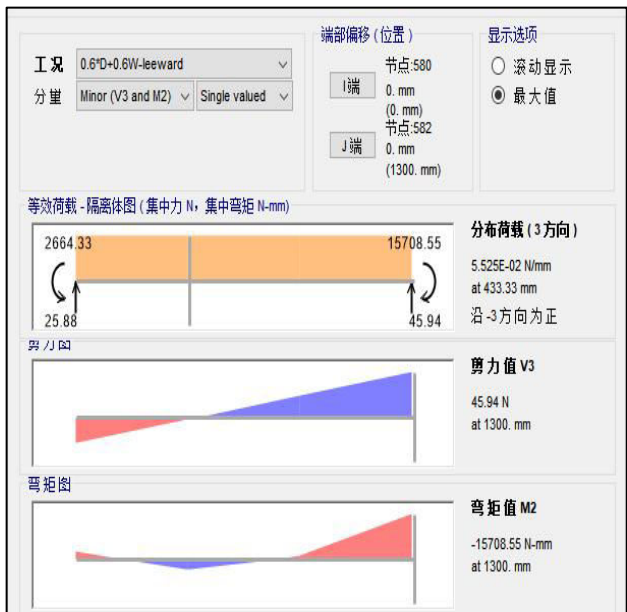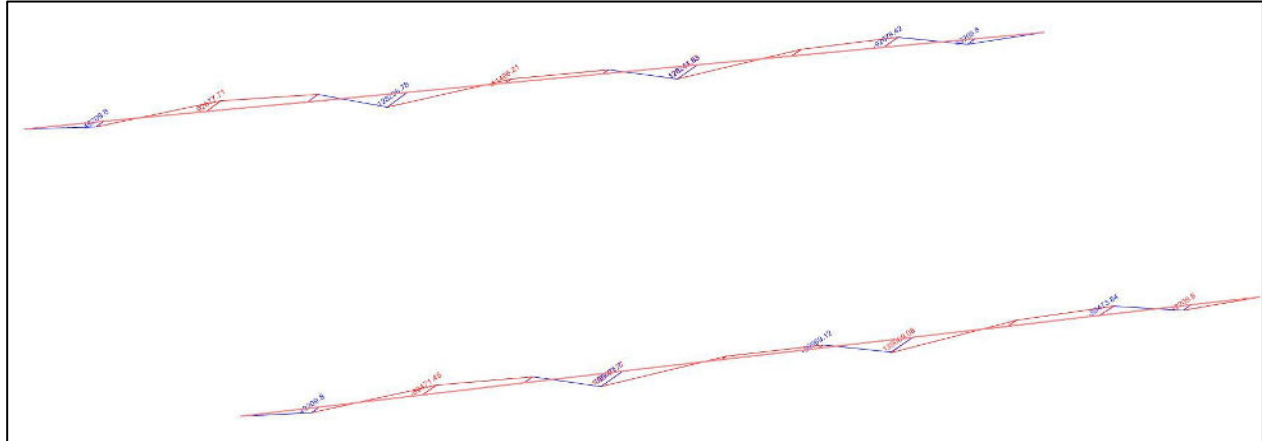

$$\begin{aligned}
 M3 &= 139071 \text{ N.mm} \\
 M2 &= 15708 \text{ N.mm} \\
 M3/W_x + M2/W_y &= 57.29 \text{ Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$


6.2 BEAM

COM1 D+S bending moment

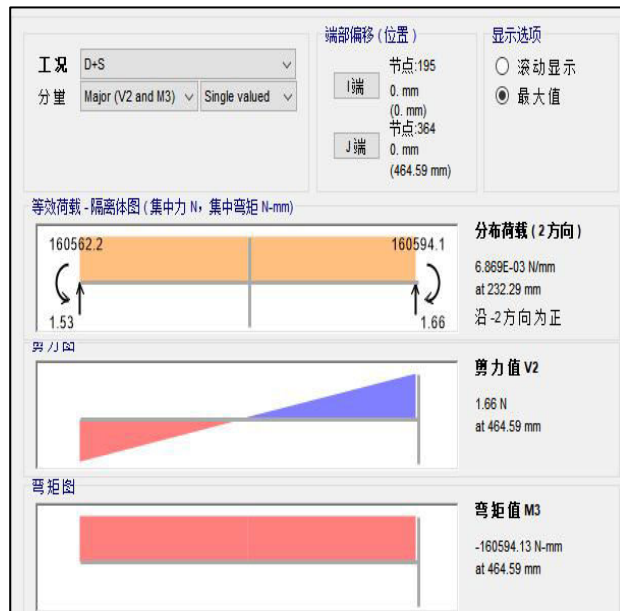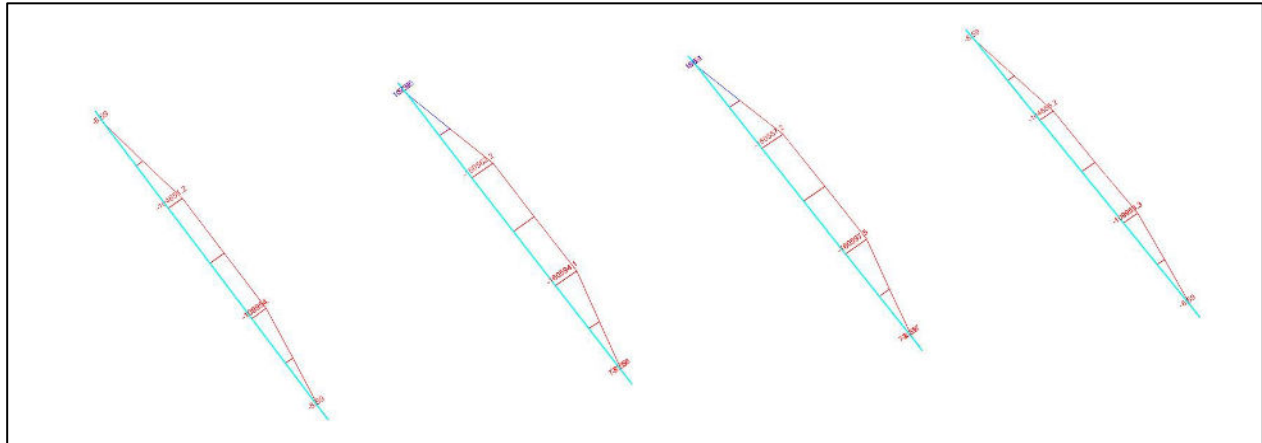



$$\begin{aligned}
 M3 &= 160594 & \text{N.mm} \\
 M2 &= 859 & \text{N.mm} \\
 M3/W_x + M2/W_y &= 44.82 & \text{Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

COM2 D+0.6*W-windard bending moment

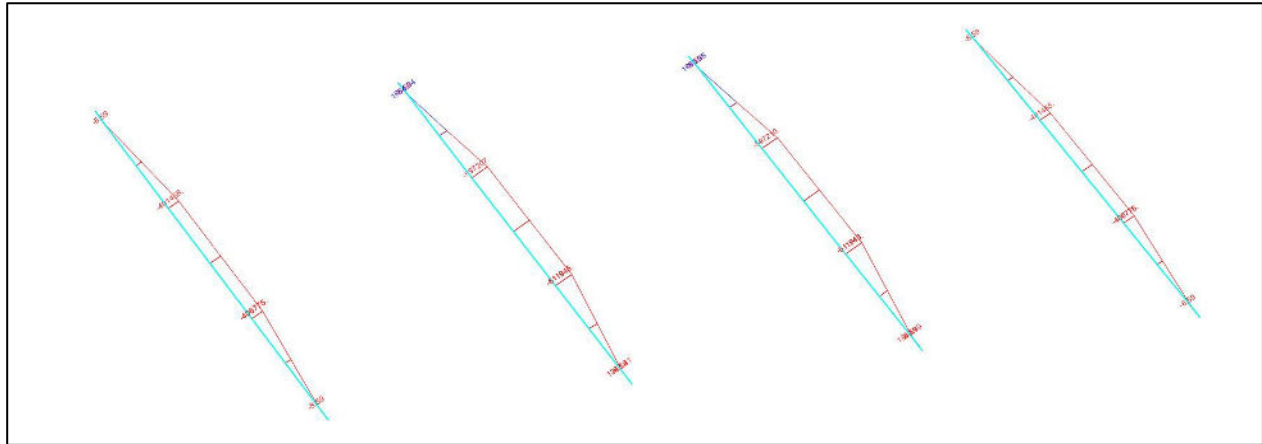


$$\begin{aligned}
 M3 &= 61194.5 \text{ N.mm} \\
 M2 &= 1215 \text{ N.mm} \\
 M3/Wx + M2/Wy &= 170.36 \text{ Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

COM3 D+0.75 (0.6W-windard) +0.75S bending moment

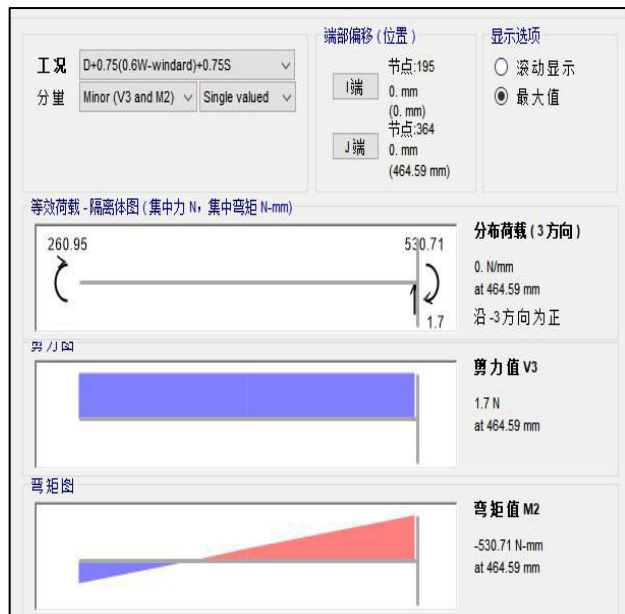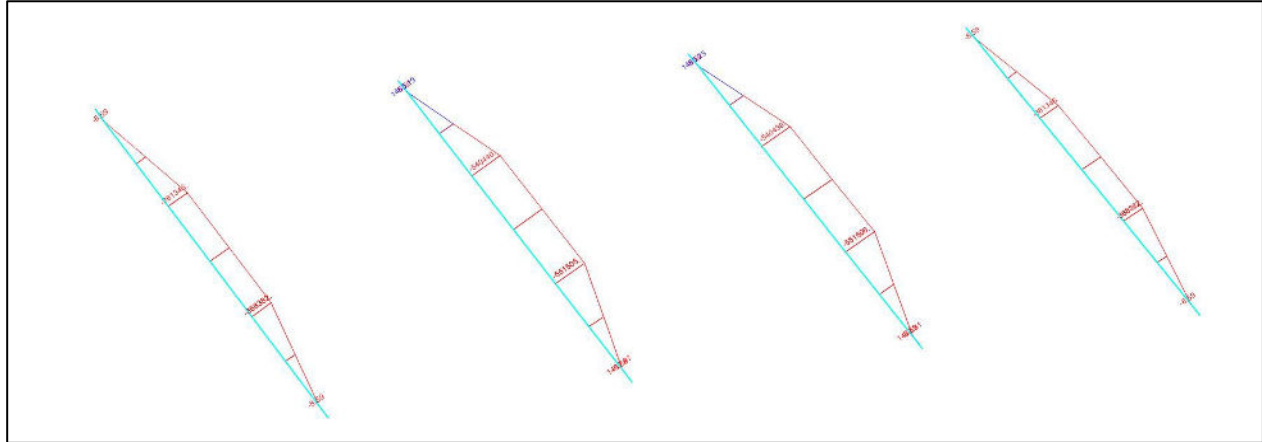

$$\begin{aligned}
 M3 &= 551505 \text{ N.mm} \\
 M2 &= 530 \text{ N.mm} \\
 M3/Wx + M2/Wy &= 153.42 \text{ Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

COM4 0.6D+0.6*W-Leeward bending moment

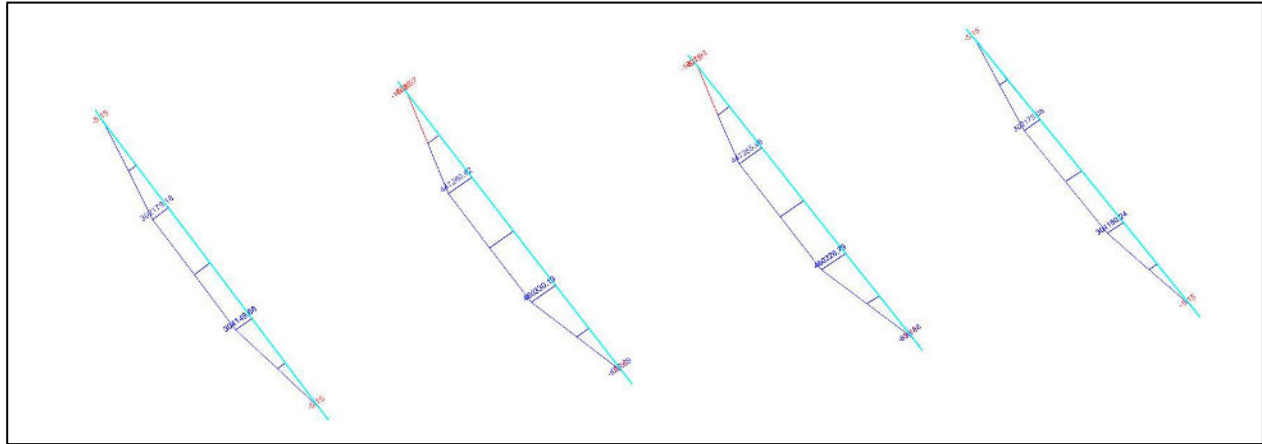

$$M3 = 460330 \text{ N.mm}$$

$$M2 = 1417 \text{ N.mm}$$

$$M3/W_x + M2/W_y = 128.26 \text{ Mpa} < 240 \text{ Mpa OK}$$

6.3 COLUMN 1



Length: 470 mm

COM1 D+S bending moment



M3=	200	N.mm
M2=	187657	N.mm
Axial=	921	N
M3/Wx+M2/Wy+Axial/area=	85.67	Mpa<240 Mpa OK
Slenderness Ratio=	35.26	<180 OK

COM2 D+0.6*W-windard bending moment

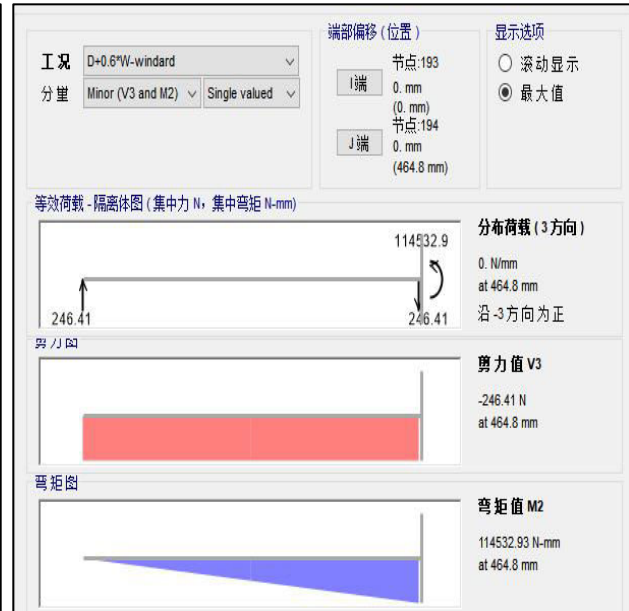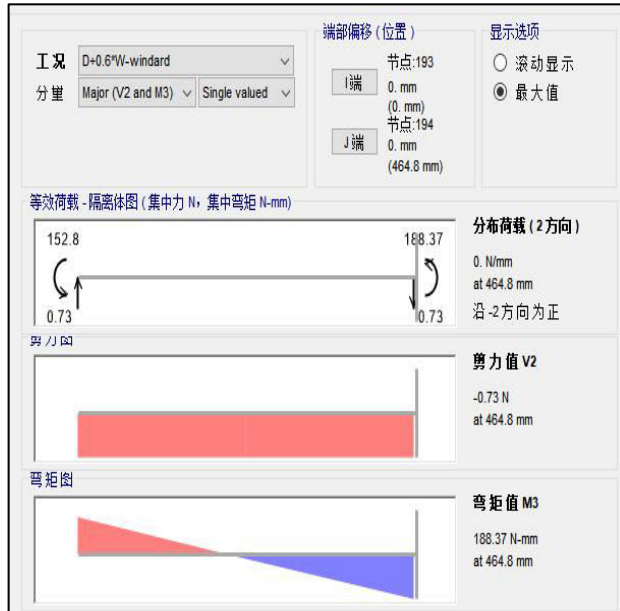



$$\begin{aligned}
 M3 &= 188 && \text{N.mm} \\
 M2 &= 114532 && \text{N.mm} \\
 \text{Axial} &= 1906 && \text{N} \\
 M3/Wx + M2/Wy + \text{Axial}/\text{area} &= 58.66 && \text{Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

COM3 D+0.75 (0.6W-windard) +0.75S bending moment



$$\begin{aligned}
 M3 &= 230 & \text{N.mm} \\
 M2 &= 21681 & \text{N.mm} \\
 \text{Axial} &= 1957 & \text{N} \\
 M3/Wx + M2/Wy + \text{Axial}/\text{area} &= 18.72 & \text{Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

COM4 0.6D+0.6*W-Leeward bending moment

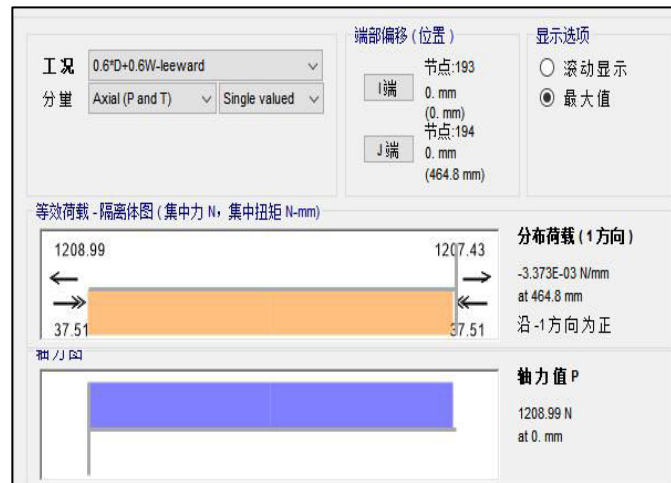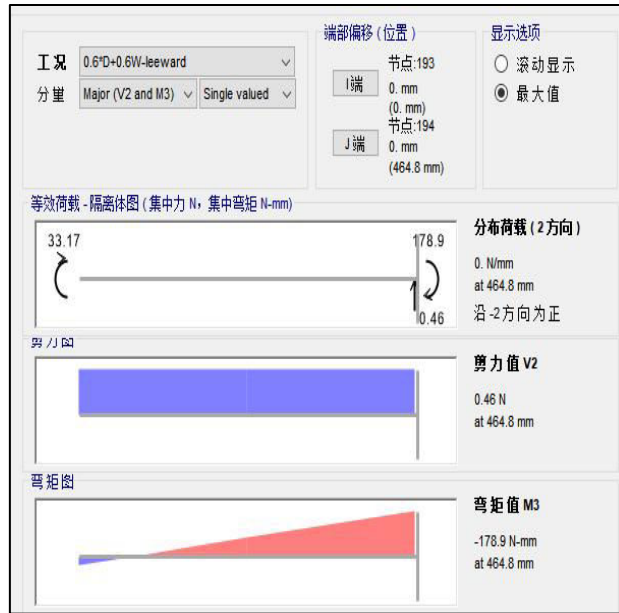

$$\begin{aligned}
 M3 &= 179 \text{ N.mm} \\
 M2 &= 200379 \text{ N.mm} \\
 \text{Axial} &= 1208 \text{ N} \\
 M3/Wx + M2/Wy + \text{Axial}/\text{area} &= 92.53 \text{ Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

6.4 COLUMN 2



Length: 353 mm

COM1 D+S bending moment



$$\begin{aligned}
 M3 &= 72 & \text{N.mm} \\
 M2 &= 295 & \text{N.mm} \\
 \text{Axial} &= 481 & \text{N} \\
 M3/Wx + M2/Wy + \text{Axial}/\text{area} &= 2.43 & \text{Mpa} < 240 \text{ Mpa OK} \\
 \text{Slenderness Ratio} &= 26.49 & < 180 \text{ OK}
 \end{aligned}$$

COM2 D+0.6*W-windard bending moment

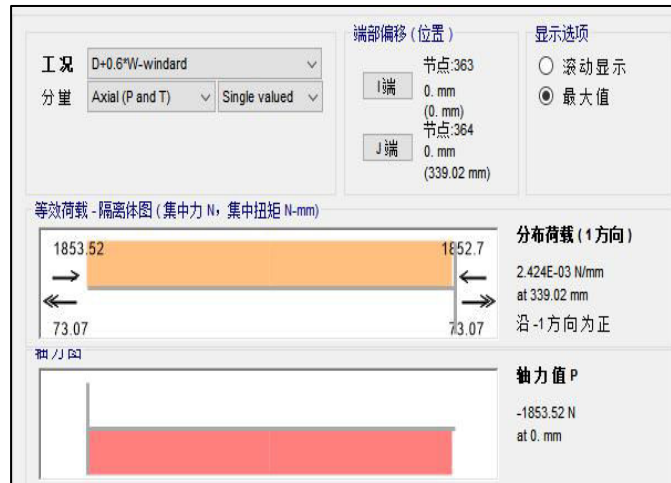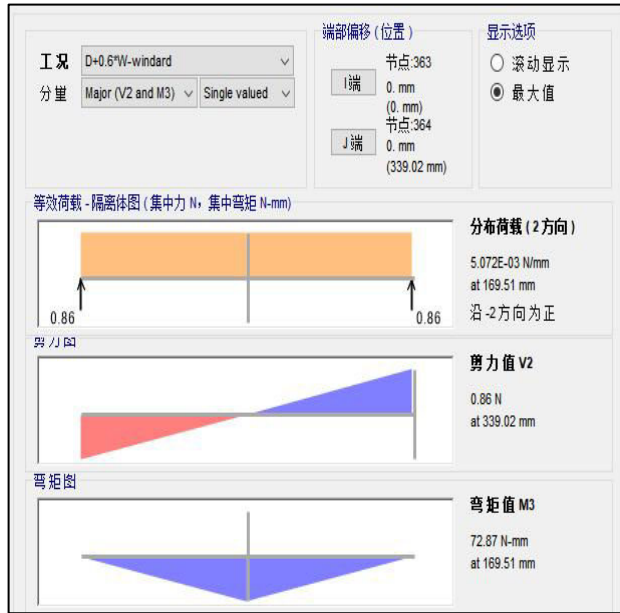

$$\begin{aligned}
 M3 &= 72 & \text{N.mm} \\
 M2 &= 706 & \text{N.mm} \\
 \text{Axial} &= 1853 & \text{N} \\
 M3/Wx + M2/Wy + \text{Axial}/\text{area} &= 9.08 & \text{Mpa} < 240 \text{ Mpa OK}
 \end{aligned}$$

COM3 D+0.75 (0.6W-windard) 0.75S bending moment



M3= 72 N.mm
 M2= 359 N.mm
 Axial= 1666 N
 M3/Wx+M2/Wy+Axial/area= 8.05 Mpa<240 Mpa OK

COM4 0.6D+0.6*W-Leeward bending moment



M3= 43 N.mm
 M2= 779 N.mm
 Axial= 1392 N
 $M3/Wx + M2/Wy + Axial/area = 6.92$ Mpa < 240 Mpa OK

6.5 SUMMARY

ITEMS	RAIL	BEAM	COLUMN 1		COLUMN 2	
	Stress (Mpa)	Stress (Mpa)	Stress (Mpa)	Slenderness Ratio	Stress (Mpa)	Slenderness Ratio
D+S	33.16	44.82	85.67	35.26	2.43	26.49
D+0.6*W-windard	73.26	170.36	58.66		9.08	
D+0.75 (0.6W-windard) +0.75s	73.71	153.42	18.72		8.05	
0.6*D+0.6W-leeward	57.29	128.26	92.53		6.92	
Allowable Value	240	240	240	180	240	180
Conclusion	OK	OK	OK	OK	OK	OK

7. WIND RESISTANCE CALCULATION OF CONCRETE FOUNDATION

Reaction Force F

Fmax=	1807.32 N < 4998 N	OK
Faverage=	1487.82 N < 4998 N	OK

Concrete foundation meets the usage requirements

The weight of concrete foundation=	$0.5 \times 0.5 \times 0.85 \times 2400 \times 9.8 \text{ N} = 4998 \text{ N}$
------------------------------------	--

TABLE: JOINT REACTIONS					
Joint	Output Case	F1	F2	F3	N
		N	N	N	
4	0.6*D+0.6W-leeward	7.29	-811.73	-387.31	-1168.38
5	0.6*D+0.6W-leeward	2.13	-342.51	-781.07	
10	0.6*D+0.6W-leeward	1.35	-1256.63	-599.91	-1807.31
11	0.6*D+0.6W-leeward	-0.94	-431.09	-1207.4	
16	0.6*D+0.6W-leeward	-0.92	-1256.6	-599.89	-1807.32
17	0.6*D+0.6W-leeward	0.46	-431.11	-1207.4	
22	0.6*D+0.6W-leeward	-6.92	-811.74	-387.32	-1168.28
23	0.6*D+0.6W-leeward	-2.46	-342.61	-780.96	



CONTACT US

support@eg4electronics.com

(903) 609-1988

www.eg4electronics.com