Anker SOLIX C2000 Gen 2 Portable Power Station

Efficient Power, Backup Longer

2,048Wh | 2,400W




Email: eco-power-solutions-us@anker.com

Note: Product specifications and details are subject to change without notice. Refer to the Anker SOLIX official website for current and accurate informationz.



Website

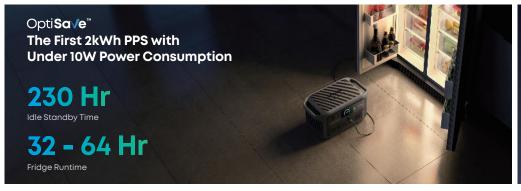









Note: The conclusions are based on data from Anker's internal laboratory tests.

| Anker SOLIX C2000 Gen 2

Capacity	
C2000X Gen 2 Capacity	51.2V / 40,000mAh / 2,048Wh
Extra Battery Capacity	2,048Wh
Maximum Battery Expansion]x
Maximum Capacity	4,096Wh (with BP2000 Expansion Battery) 5,120Wh (with BP3000 Expansion Battery)
Output	
AC Rated Power	2,400W
Surge Power	3,000W
Peak Power	4,000W
AC Sockets	1× TT-30 5× AC Outlets
USB-C Output	3× 140W Max
USB-A Output	1× 12W Max
Car Charger Output	12V=10A
Input	
AC Input Power	120V~15A, 60Hz, 1,800W
DC Input Ports (XT-60)	Max 800W, 60V
Other Specifications	
Life Cycle	4,000+ (to 80%)
Weight	41 lbs (18.9 kg)
Dimensions	18.1 × 9.8 × 10.1" (459 × 250 × 257 mm)