


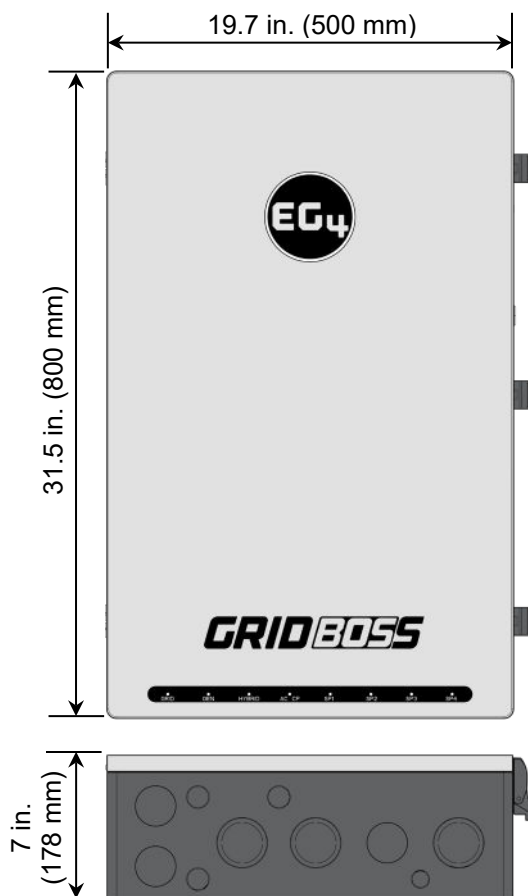

EG4[®] GRID BOSS

MICRO-GRID INTERCONNECTION DEVICE (MID)

The EG4 GridBOSS Micro-Grid Interconnection Device (MID) simplifies Energy Storage Systems (ESS) by consolidating multiple components into a single, innovative unit. It replaces traditional elements such as the point of common connection, back-fed breakers, feeder taps, tap breakers, supply-side taps, transfer switches, and dedicated combiner panels for grid-in, grid-out, and generator input. As a versatile solution, the GridBOSS serves as the service entrance equipment* when paired with the utility meter, providing a single point of connection for utilities, hybrid inverters, generators, smart loads, and AC-coupled inverters.

**200A SERVICE
ENTRANCE***

**4 CONFIGURABLE
SMART PORTS**

**INTEGRATED
GENERATOR SUPPORT**

CENTRALIZED ESS CONTROL

Provides a single point of connection for utility, hybrid inverters, generators, smart loads, and AC-coupled inverters.

REDUCED ESS COMPLEXITY

Replaces up to 10 components with one unit, including point of common connection, back-fed breakers, feeder taps, feeder tap breakers, supply side taps & breakers, transfer switches, and dedicated combiner panels for grid-in, load/EPS, and generator input.

SERVICE ENTRANCE RATED

200 Amp service entrance with a 22 kAIC main breaker, acts as service entrance equipment in conjunction with a utility meter and a 200A Eaton breaker (CSR25K).

REMOTE MONITORING

Enable remote monitoring, configuration, and firmware updates through the EG4 mobile app or online monitoring system.

SMART PORTS

Includes load shedding, which disconnects loads during low battery voltage and reconnects on high voltage. Power shedding connects loads when at full SOC and PV flow and disconnects on low SOC or PV loss.

*When used with an Eaton 200A main breaker (model CSR25K).

T E C H N I C A L S P E C I F I C A T I O N S

GRID

NOMINAL AC VOLTAGE	120/240VAC (L1/L2/N required)
FREQUENCY	60 Hz
MAXIMUM CURRENT	200A
SERVICE ENTRANCE RATED	22kAIC with 200A Eaton breaker (model: (CSR2200N) CSR25K)

GENERATOR

NOMINAL VOLTAGE	120/240VAC (L1/L2/N required)
FREQUENCY	60 Hz
MAXIMUM CURRENT	125A

NON-BACKUP

NOMINAL VOLTAGE	120/240VAC (L1/L2/N required)
FREQUENCY	60 Hz
MAXIMUM CURRENT	200A

BACKUP

NOMINAL VOLTAGE	120/240VAC (L1/L2/N required)
FREQUENCY	60 Hz
MAXIMUM CURRENT	200A

HYBRID

NUMBER OF PORTS	3
NOMINAL VOLTAGE	120/240VAC (L1/L2/N required)
FREQUENCY	60 Hz
MAXIMUM CURRENT PER PORT	70A*
SUPPORTED INVERTERS**	EG4® 12kPV, 18kPV, & FlexBOSS21

SMART PORTS

NUMBER OF PORTS	4
NOMINAL VOLTAGE	120/240VAC (L1/L2/N required)
FREQUENCY	60 Hz
MAXIMUM CURRENT PER PORT	1: 125A 2: 80A 3: 60A 4: 60A

GENERAL DATA

COMMUNICATION INTERFACE	RS485/Wi-Fi/CAN
INTERNAL BUS RATING	350A
INTERNAL FUSE RATING	315A
OPERATING ALTITUDE	<6561 ft (<2000 m)
RELATIVE HUMIDITY	0 – 100%
OUTDOOR RATING	NEMA 3R
OPERATING AMBIENT TEMPERATURE RANGE	-40°F – 140°F (-40°C – 60°C)
PRODUCT DIMENSIONS (H×W×D)	31.5×19.7×7 in (800×500×178 mm)
UNIT WEIGHT	55 lbs. (25 kg)
STANDARD WARRANTY	10-year standard warranty

STANDARDS AND CERTIFICATIONS

UL1741, UL67, UL869A***

FCC PART 15, CLASS B (PENDING)

*Install a properly sized breaker based on the connected inverter: 50A - 12kPV; 70A - 18kPV; 90A - FlexBOSS21.

**Third party inverters are not supported and cannot be connected to the hybrid ports.

***When used with an Eaton 200A main breaker (model (CSR2200N) CSR25K).